

LIGHT & BEYOND

2022

Oltre alla luce

Beyond light

Illuminare un ambiente premendo un interruttore è un gesto semplice: un tocco immediato e la stanza prende forma, mostrandosi nell'esperienza quotidiana. Dietro a questa azione si nasconde il lavoro illuminotecnico, fatto di progetti e visioni, che permette di sfruttare le peculiarità di apparecchi e spazi, combinandoli tra loro affinché diano la migliore resa possibile. Per questo abbiamo voluto rafforzare la famiglia di **KLIK_KLAK** integrando nuovi elementi e varianti che gli permettessero di essere il miglior sistema magnetico a binario possibile. Con l'introduzione della versione **Mini**, si aprono nuove strade di intervento dove è richiesta una presenza discreta e minimale. Dall'altra parte, **Bellatrix** si aggiunge alla gamma di incassi Logica, distinguendosi per la sua funzionalità e versatilità.

Lighting an area turning the light on is a simple operation: a quick touch and the room shapes up, shows itself in its daily experience. Behind this action though, it's hidden the lighting designer's work, made of projects and visions which make sure that all peculiarities of fittings and spaces are combined so that the best and most rewarding solution is achieved. This is why we have strengthened **KLIK_KLAK** range adding new fittings and versions which make it the best magnetic system possible. Thanks to the introduction of the new **Mini** version, new installation opportunities open up, especially where a discreet and minimal presence is required. On the other hand, **Bellatrix** adds up to **Logica** downlights range, distinguishing itself for its functionality and versatility.



Workplace + KLIK_KLAK

Installazione a modo tuo! Place it your own way!

KLIK_KLAK è un sistema completo declinabile in diverse tipologie di installazione: incasso a raso, a soffitto e a sospensione. I raccordi disponibili permettono di adattarlo a qualsiasi superficie e di introdurre dei cambi di piano: in questo modo si può inserire in maniera minimale negli spazi abitativi e commerciali rendendo la luce parte integrante del progetto di design.


KLIK_KLAK is a complete system suitable for recessed, ceiling-mounted or suspended installation. The many accessories available allow different solutions including multilevel combinations; it's the ideal choice for a discreet and minimal lighting solution both in residential and commercial areas making light an integral part of the whole project.



Bookshop + KLIK_KLAK Mini




Kitchen + KLIK_KLAK Mini

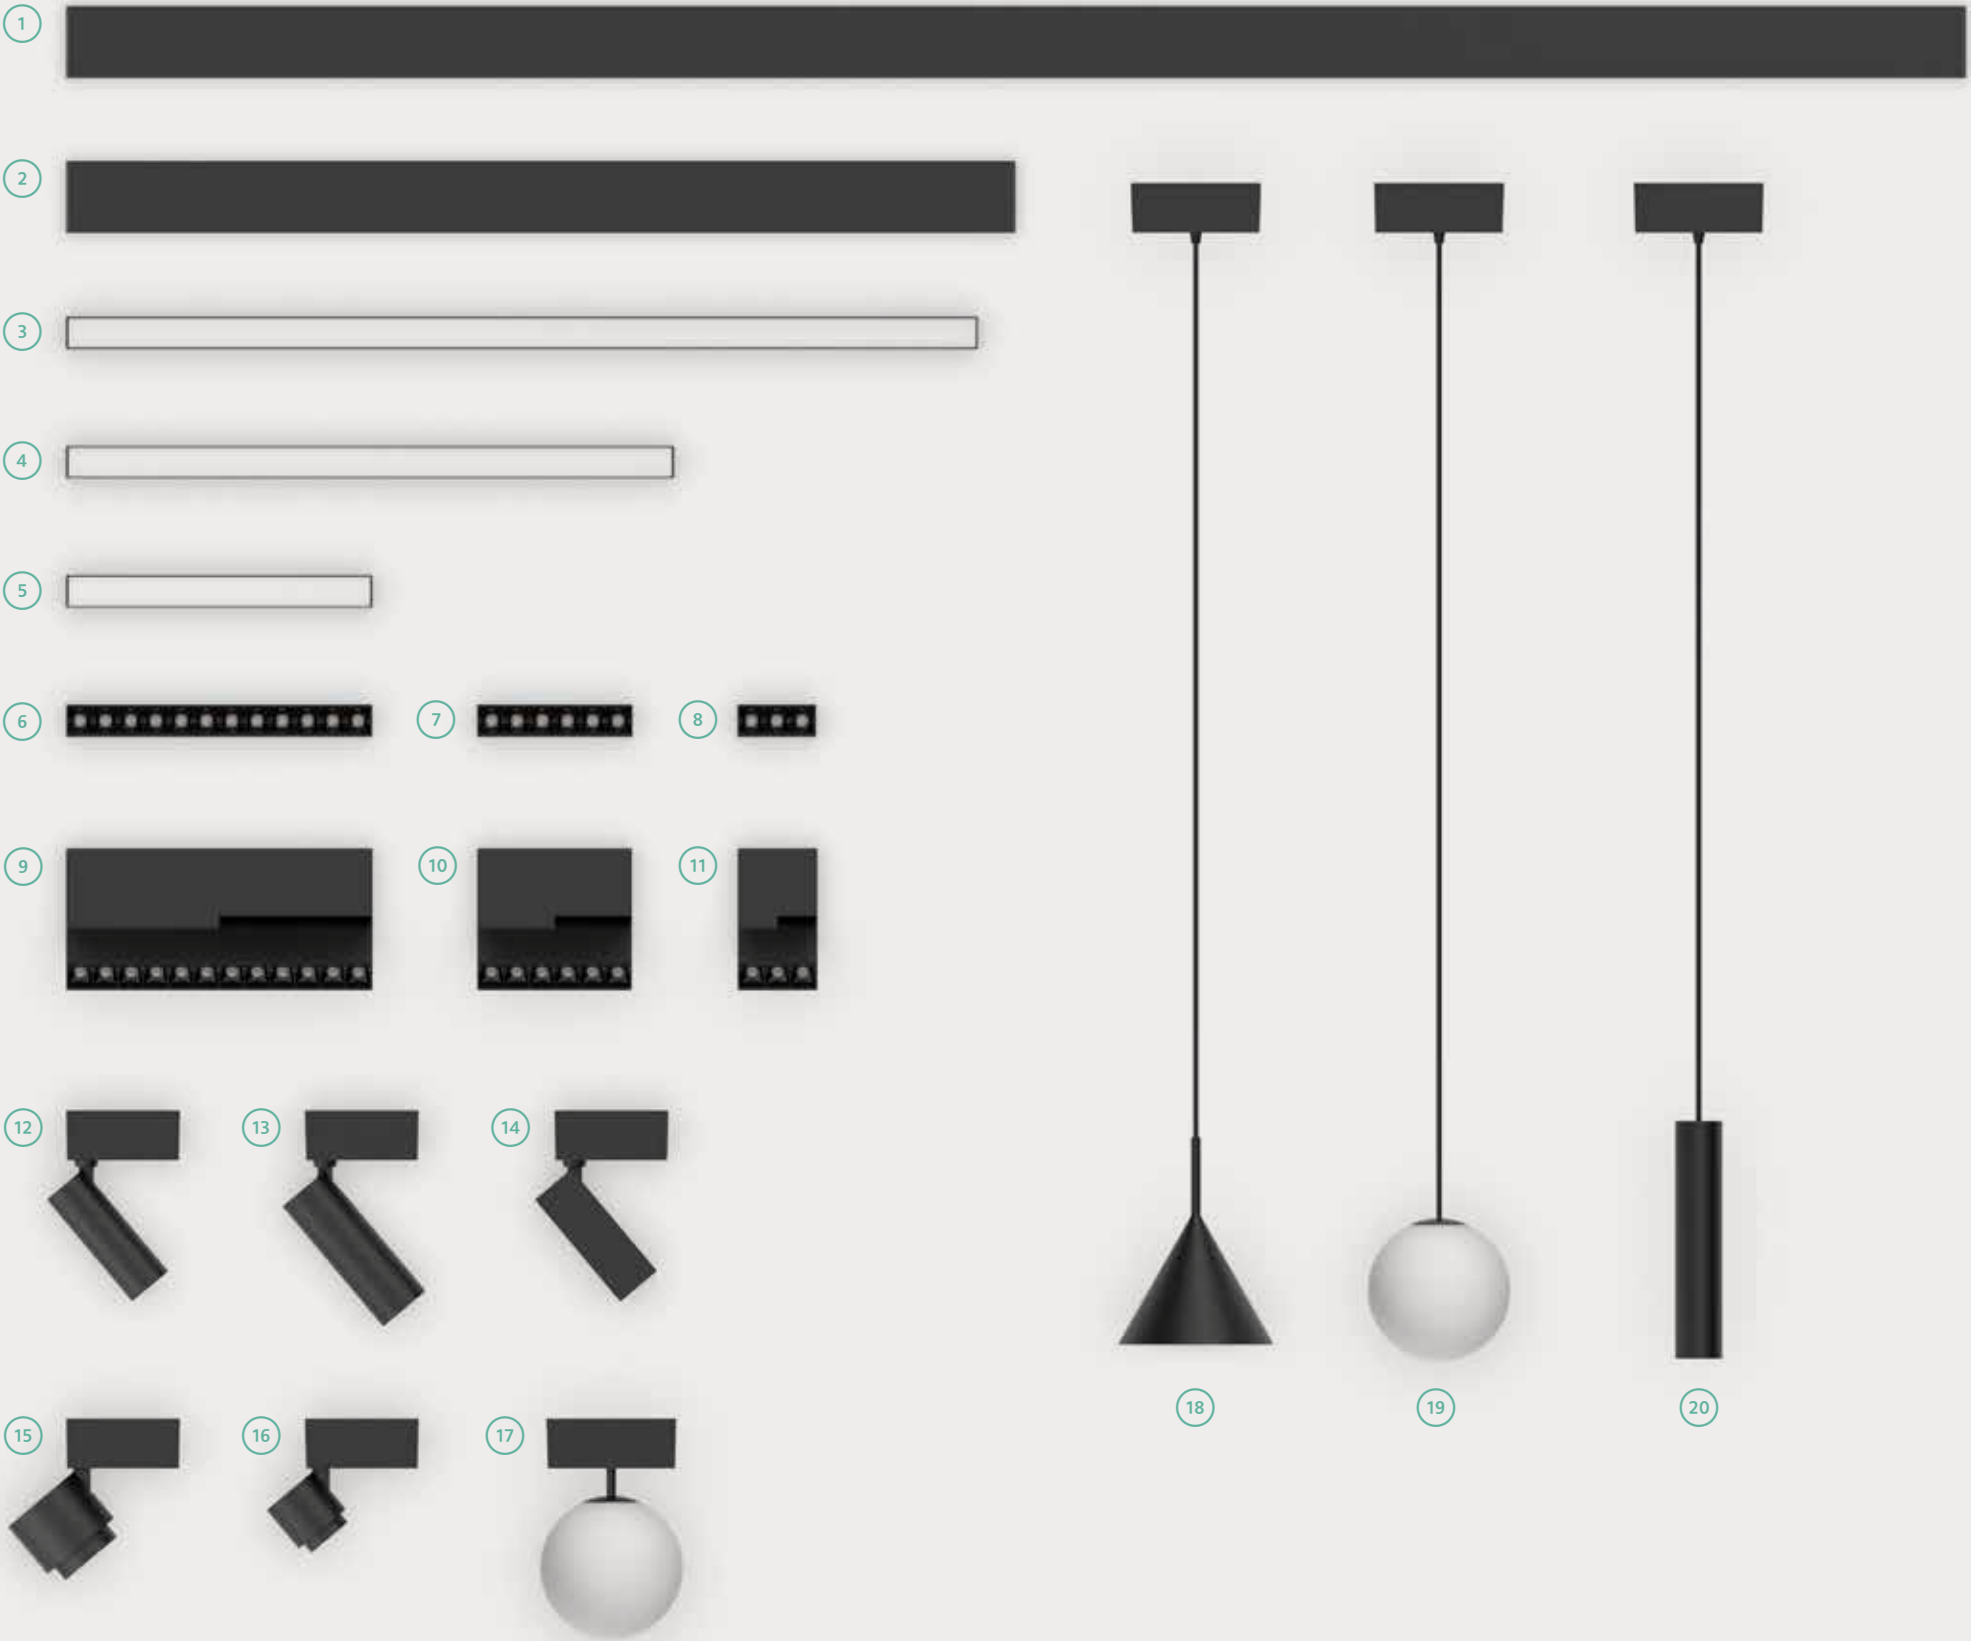

- 1 Binario 2mt
2m profile
- 2 Binario 1mt
1m profile
- 3 Luce diffusa 39W
Wide beam general lighting 39W
- 4 Luce diffusa 26W
Wide beam general lighting 26W
- 5 Luce diffusa 13W
Wide beam general lighting 13W
- 6 Luce puntiforme x12
Dots light x12
- 7 Luce puntiforme x6
Dots light x6
- 8 Luce puntiforme x3
Dots light x3
- 9 Luce puntiforme orientabile x12
Adjustable dots light x12
- 10 Luce puntiforme orientabile x6
Adjustable dots light x6
- 11 Luce puntiforme orientabile x3
Adjustable dots light x3
- 12 Proiettore 10W
Spotlight 10W
- 13 Proiettore 20W
Spotlight 20W
- 14 Proiettore Q 10W
Spotlight Q 10W
- 15 Proiettore 15W
Spotlight 15W
- 16 Proiettore 8W
Spotlight 8W
- 17 Globo
Globe
- 18 Sospensione bell
Suspension bell
- 19 Sospensione globo
Suspension globe
- 20 Sospensione cilindro
Suspension cylinder


Klik_Klak Mini

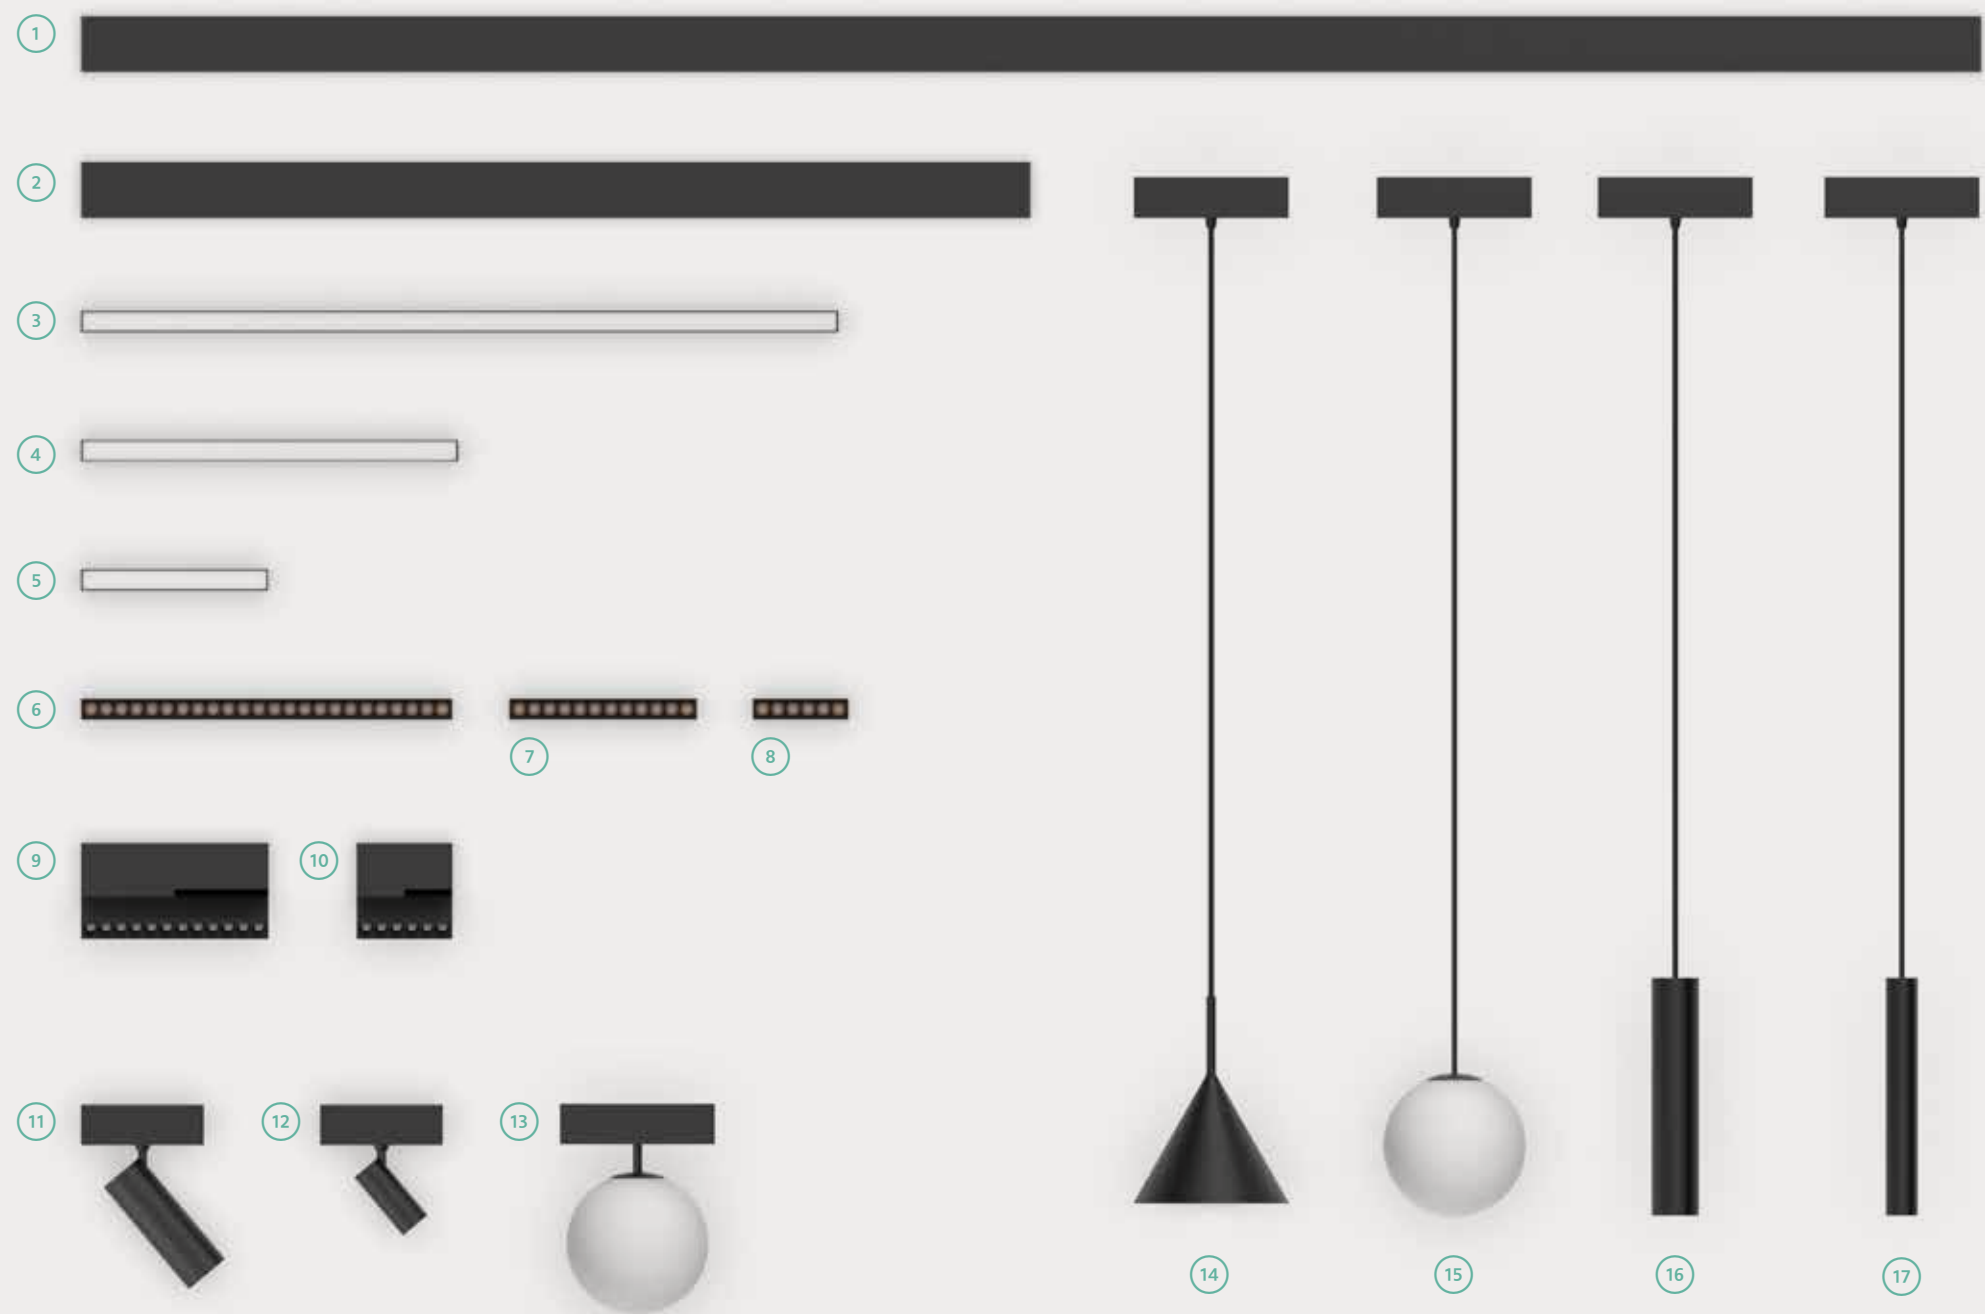

- 1** Binario 2mt
2m profile
- 2** Binario 1mt
1m profile
- 3** Luce diffusa 30W
Wide beam general lighting 30W
- 4** Luce diffusa 15W
Wide beam general lighting 15W
- 5** Luce diffusa 8W
Wide beam general lighting 8W
- 6** Luce puntiforme x24
Dots light x24
- 7** Luce puntiforme x12
Dots light x12
- 8** Luce puntiforme x6
Dots light x6
- 9** Luce puntiforme orientabile x12
Adjustable dots light x12
- 10** Luce puntiforme orientabile x6
Adjustable dots light x6
- 11** Proiettore 10W
Spotlight 10W
- 12** Proiettore 5W
Spotlight 5W
- 13** Globo
Globe
- 14** Sospensione bell
Suspension bell
- 15** Sospensione globo
Suspension globe
- 16** Sospensione cilindro 10W
Suspension cylinder 10W
- 17** Sospensione cilindro 5W
Suspension cylinder 5W

Dimensioni a confronto

Comparing dimensions

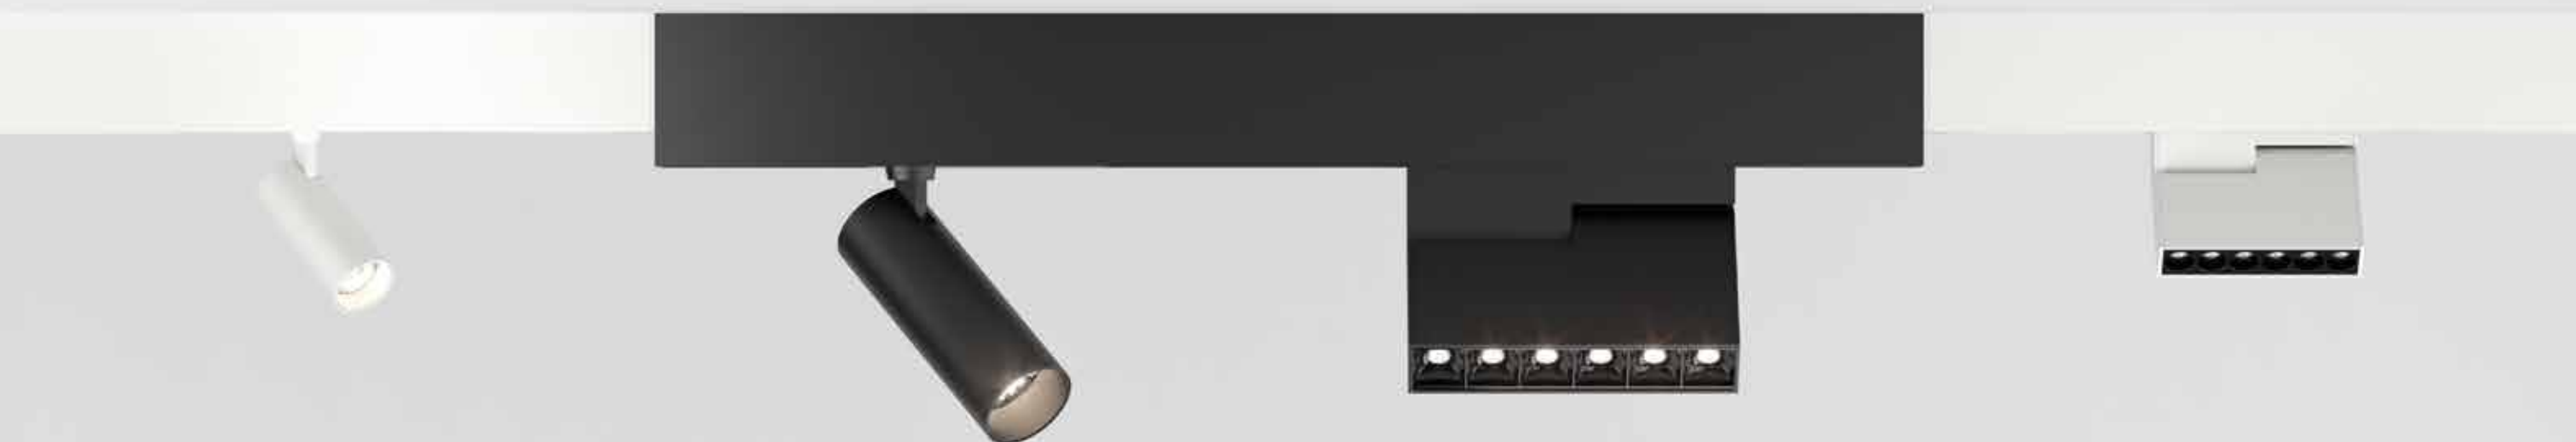


KLIK_KLAK affianca la versione MINI che, con la sua dimensione ridotta del 30% trova una collocazione ancora più minimale nell'ambito della progettazione.

L'espansione della famiglia, STD e MINI, riesce definitivamente ad incontrare le molteplici soluzioni illuminotecniche e d' arredamento.

KLIK_KLAK adds the MINI version which thanks to its dimensions, reduced by 30%, finds even a more minimal collocation during the interior designing process.

The whole range, STD and MINI, is definitely able to meet all lighting and interior design requirements.

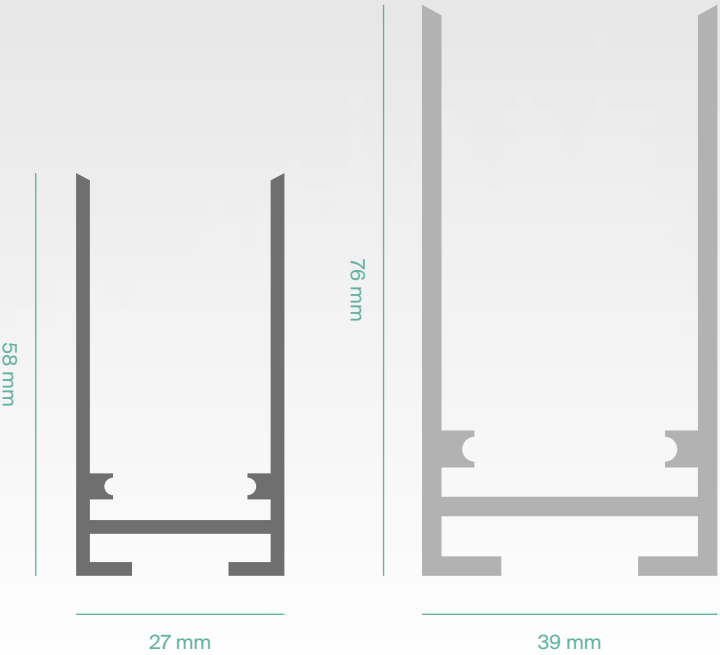

Sistema magnetico

Magnetic system

Il sistema KLIK_KLAK sfrutta la potenza del magnete permanente NdFeB, il più potente del mondo. L'inserimento e lo spostamento dei corpi illuminanti con fissaggio magnetico risulta estremamente semplice e sicuro da maneggiare grazie all'alimentazione a 24V. L'ampliamento degli accessori completa un'offerta in grado di "giocare" con la luce.

KLIK_KLAK magnetic system counts on the power of NdFeb permanent magnet, the most powerful in the world. The installation and the eventual shifting of the fittings from one place to another on the low voltage 24V profile is extremely simple and safe. The wider range of accessories completes an offer which allows to "play" with light.





Shop + KLIK_KLAK



Anche negli ambienti più esclusivi KLIK_KLAK si distingue per la sua integrabilità nello spazio, definendo e completando qualsiasi progetto.

Even in the most exclusive surroundings, KLIK_KLAK distinguishes itself for its full integration in the space, marking and completing any project.



Bedroom + KLIK_KLAK Mini



KLIK KLAK PROIETTORE


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41111	Nero/Black	10W	749	36°	3000K	Magnetic Track
41112	Bianco/White	10W	749	36°	3000K	Magnetic Track
41179	Nero/Black	10W	870	36°	4000K	Magnetic Track
41192	Bianco/White	10W	870	36°	4000K	Magnetic Track
41772	Nero/Black	20W	1450	36°	3000K	Magnetic Track
41773	Bianco/White	20W	1450	36°	3000K	Magnetic Track

INSTALLAZIONE APPLICATION




Binario magnetico/
Magnetic track

DISEGNI TECNICI TECHNICAL DRAWINGS



41111
41112
41179
41192



41772
41773

REGOLAZIONI ADJUSTABILITY



355°
90°

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3



KLIK KLAK PROIETTORE Q


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41770	Nero/Black	10W	670	36°	3000K	Magnetic Track
41771	Bianco/White	10W	670	36°	3000K	Magnetic Track

INSTALLAZIONE APPLICATION



Binario magnetico/
Magnetic track

DISEGNI TECNICI TECHNICAL DRAWINGS



REGOLAZIONI ADJUSTABILITY



355°
90°

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3



KLIK KLAK PROIETTORE


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41176	Nero/Black	8W	404	36°	3000K	Magnetic Track
41175	Bianco/White	8W	404	36°	3000K	Magnetic Track
41178	Nero/Black	15W	904	36°	3000K	Magnetic Track
41177	Bianco/White	15W	904	36°	3000K	Magnetic Track
41214	Nero/Black	8W	404	36°	4000K	Magnetic Track
41213	Bianco/White	8W	404	36°	4000K	Magnetic Track
41216	Nero/Black	15W	904	36°	4000K	Magnetic Track
41215	Bianco/White	15W	904	36°	4000K	Magnetic Track

INSTALLAZIONE APPLICATION




Binario magnetico/
Magnetic track

DISEGNI TECNICI TECHNICAL DRAWINGS



41213 41175
41214 41176



41215 41177
41216 41178


REGOLAZIONI ADJUSTABILITY



355°
90°

LED
CRI
PF
SDCM


CREE
>90
>0.5
<3



KLIK KLAK GLOBO


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41778	Nero/Black	10W	610	DIFF.	3000K	Magnetic Track
41779	Bianco/White	10W	610	DIFF.	3000K	Magnetic Track

INSTALLAZIONE APPLICATION






Binario magnetico/
Magnetic track

DISEGNI TECNICI TECHNICAL DRAWINGS



LED
CRI
PF
SDCM

CREE
>90
>0.5
<3

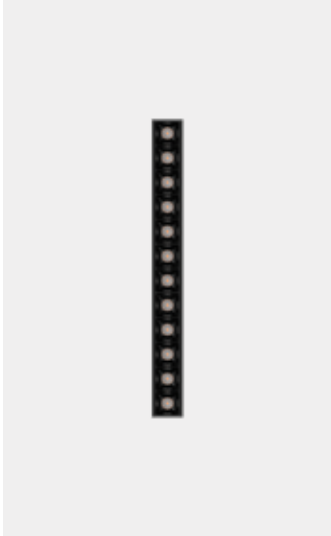

KLIK_KLAK PUNTIFORME

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41119	Nero/Black	4W	375	34°	3000K	Magnetic Track
41122	Bianco/White	4W	375	34°	3000K	Magnetic Track
41120	Nero/Black	8W	788	34°	3000K	Magnetic Track
41123	Bianco/White	8W	788	34°	3000K	Magnetic Track
41121	Nero/Black	16W	1519	34°	3000K	Magnetic Track
41124	Bianco/White	16W	1519	34°	3000K	Magnetic Track
41199	Nero/Black	4W	381	34°	4000K	Magnetic Track
41202	Bianco/White	4W	381	34°	4000K	Magnetic Track
41200	Nero/Black	8W	801	34°	4000K	Magnetic Track
41203	Bianco/White	8W	801	34°	4000K	Magnetic Track
41201	Nero/Black	16W	1530	34°	4000K	Magnetic Track
41204	Bianco/White	16W	1530	34°	4000K	Magnetic Track

INSTALLAZIONE APPLICATION



Binario magnetico/
Magnetic track

DISEGNI TECNICI TECHNICAL DRAWINGS



41199
41202
41119
41122

41200
41203
41120
41123

41201
41204
41121
41124




KLIK_KLAK PUNTIFORME ORIENTABILE

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41125	Nero/Black	4W	375	34°	3000K	Magnetic Track
41128	Bianco/White	4W	375	34°	3000K	Magnetic Track
41126	Nero/Black	8W	788	34°	3000K	Magnetic Track
41129	Bianco/White	8W	788	34°	3000K	Magnetic Track
41127	Nero/Black	16W	1519	34°	3000K	Magnetic Track
41130	Bianco/White	16W	1519	34°	3000K	Magnetic Track
41205	Nero/Black	4W	381	34°	4000K	Magnetic Track
41208	Bianco/White	4W	381	34°	4000K	Magnetic Track
41206	Nero/Black	8W	801	34°	4000K	Magnetic Track
41209	Bianco/White	8W	801	34°	4000K	Magnetic Track
41207	Nero/Black	16W	1530	34°	4000K	Magnetic Track
41210	Bianco/White	16W	1530	34°	4000K	Magnetic Track

INSTALLAZIONE APPLICATION




Binario magnetico/
Magnetic track

DISEGNI TECNICI TECHNICAL DRAWINGS



41205
41208
41125
41128

41206
41209
41126
41129




41207
41210
41127
41130



REGOLAZIONI ADJUSTABILITY



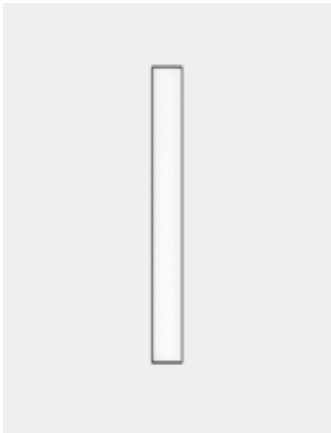


KLIK_KLAK
LUCE DIFFUSA

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3

CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41113	Nero/Black	13W	962	105°	3000K	Magnetic Track
41116	Bianco/White	13W	962	105°	3000K	Magnetic Track
41114	Nero/Black	26W	1858	105°	3000K	Magnetic Track
41117	Bianco/White	26W	1858	105°	3000K	Magnetic Track
41115	Nero/Black	39W	2729	105°	3000K	Magnetic Track
41118	Bianco/White	39W	2729	105°	3000K	Magnetic Track
41193	Nero/Black	13W	965	105°	4000K	Magnetic Track
41196	Bianco/White	13W	965	105°	4000K	Magnetic Track
41194	Nero/Black	26W	2030	105°	4000K	Magnetic Track
41197	Bianco/White	26W	2030	105°	4000K	Magnetic Track
41195	Nero/Black	39W	2945	105°	4000K	Magnetic Track
41198	Bianco/White	39W	2945	105°	4000K	Magnetic Track

INSTALLAZIONE
APPLICATION




Binario magnetico/
Magnetic track

DISEGNI TECNICI
TECHNICAL DRAWINGS



41113
41116

41193
41196



41114
41117

41194
41197



41115
41118

41195
41198



KLIK_KLAK
SOSPENSIONE

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41174	Nero/Black	10W	749	36°	3000K	Magnetic Track
41173	Bianco/White	10W	749	36°	3000K	Magnetic Track
41212	Nero/Black	10W	870	36°	4000K	Magnetic Track
41211	Bianco/White	10W	870	36°	4000K	Magnetic Track

INSTALLAZIONE
APPLICATION



Binario magnetico/
Magnetic track

DISEGNI TECNICI
TECHNICAL DRAWINGS

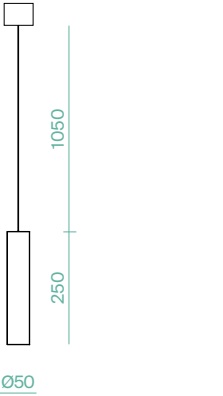



KLIK_KLAK
SOSPENSIONE
GLOBO

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3

CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41774	Nero/Black	10W	610	DIFF.	3000K	Magnetic Track
41775	Bianco/White	10W	610	DIFF.	3000K	Magnetic Track

INSTALLAZIONE
APPLICATION



Binario magnetico/
Magnetic track

DISEGNI TECNICI
TECHNICAL DRAWINGS



KLIK_KLAK
SOSPENSIONE
BELL

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41776	Nero/Black	10W	480	65°	3000K	Magnetic Track
41777	Bianco/White	10W	480	65°	3000K	Magnetic Track

INSTALLAZIONE
APPLICATION




Binario magnetico/
Magnetic track


DISEGNI TECNICI
TECHNICAL DRAWINGS



ACCESSORI
ACCESSORIES




41136 - 41137




41138 - 41139



41140 - 41141



41142 - 41143



41131



41222 - 41223




41132/A - 41133/A




41134 - 41135



41240 - 41241



41257 - 41258




41259 - 41260



42787 - 42784 - 42788 - 42785



42789 - 42786



42811 - 42808 - 42812 - 42809



42813 - 42810

CODE	FINISHING	DESCRIPTION
41109	Nero / Black	Struttura 1mt in alluminio estruso con testate / 1mt extruded aluminium profile with end-caps
41110	Bianco / White	Struttura 1mt in alluminio estruso con testate / 1mt extruded aluminium profile with end-caps
41144	Nero / Black	Struttura 2mt in alluminio estruso con testate / 2mt extruded aluminium profile with end-caps
41145	Bianco / White	Struttura 2mt in alluminio estruso con testate / 2mt extruded aluminium profile with end-caps
41146	Nero / Black	Copertura per rasatura 1 mt/1 mt mask for plasterboard thinning

ACCESSORI
ACCESSORIES

CODE	FINISHING	DESCRIPTION
41136	Nero / Black	Angolo 90° e accessori / 90° corner with accessories
41137	Bianco / White	Angolo 90° e accessori / 90° corner with accessories
41138	Nero / Black	Angolo 90° esterno e accessori/ Outer 90° corner with accessories
41139	Bianco / White	Angolo 90° esterno e accessori/ Outer 90° corner with accessories
41140	Nero / Black	Angolo 90° interno e accessori/ Inner 90° corner with accessories
41141	Bianco / White	Angolo 90° interno e accessori/ Inner 90° corner with accessories
41142	Nero / Black	Congiunzione elettrica con spinotti/ Linear 65mm electric connection with relative 3-pins connector
41143	Bianco / White	Congiunzione elettrica con spinotti/ Linear 65mm electric connection with relative 3-pins connector
41131	Nero / Black	Kit staffe incasso (2 pz)/ Brackets for recessed installation (2 pcs)
41222	Nero / Black	Staffe attacco soffitto kit 2pz/Brackets for ceiling installation 2 pcs
41223	Bianco / White	Staffe attacco soffitto kit 2pz/Brackets for ceiling installation 2 pcs
41132	Acciaio/Steel	Sospensione 2mt (1 pz) / Suspension 2mt (1 pc)
41132/A	Nero / Black	Sospensione con cavo alimentazione 2mt (1 pz)/ Suspension 2mt with electrical wire (1 pc)
41133/A	Bianco / White	Sospensione con cavo alimentazione 2mt (1 pz)/ Suspension 2mt with electrical wire (1 pc)
41134	Nero / Black	Staffa connessione (1 pz) /Linear connection plate (1 pc)
41135	Bianco / White	Staffa connessione (1 pz) /Linear connection plate (1 pc)
41258	Nero / Black	Giunto a "X"/"X" connector
41257	Bianco / White	Giunto a "X"/"X" connector
41260	Nero / Black	Giunto a "T"/"T" connector
41259	Bianco / White	Giunto a "T"/"T" connector
41241	Nero / Black	Testata per alimentazione 24V/Front feed 24V
41240	Bianco / White	Testata per alimentazione 24V/Front feed 24V
41782	Nero / Black	Ponte di giunzione elettrica 165mm/Electric bridge connector 165mm
41783	Bianco / White	Ponte di giunzione elettrica 165mm/Electric bridge connector 165mm
42787	Nero / Black	Testata c/ driver 75W 230V dimm./Front feed w/ driver 75W 230V dimm.
42784	Bianco / White	Testata c/ driver 75W 230V dimm./Front feed w/ driver 75W 230V dimm.
42788	Nero / Black	Testata c/ driver 100W 230V dimm./Front feed w/ driver 100W 230V dimm.
42785	Bianco / White	Testata c/ driver 100W 230V dimm./Front feed w/ driver 100W 230V dimm.
42789	Nero / Black	Testata c/ driver 150W 230V dimm./Front feed w/ driver 150W 230V dimm.
42786	Bianco / White	Testata c/ driver 150W 230V dimm./Front feed w/ driver 150W 230V dimm.
42811	Nero / Black	Centrale c/ driver 75W 230V dimm./Central feed w/ driver 75W 230V dimm.
42808	Bianco / White	Centrale c/ driver 75W 230V dimm./Central feed w/ driver 75W 230V dimm.
42812	Nero / Black	Centrale c/ driver 100W 230V dimm./Central feed w/ driver 100W 230V dimm.
42809	Bianco / White	Centrale c/ driver 100W 230V dimm./Central feed w/ driver 100W 230V dimm.
42813	Nero / Black	Centrale c/ driver 150W 230V dimm./Central feed w/ driver 150W 230V dimm.
42810	Bianco / White	Centrale c/ driver 150W 230V dimm./Central feed w/ driver 150W 230V dimm.

DRIVER

CODE	WATT	V	DESCRIPTION	SIZE	MODE
22015	50W	24V DC	Driver MW	99x82x30mm	ON-OFF
22031	60W	24V DC	Driver EAGLERISE TRP	187x45x31mm	ON-OFF
22032	75W	24V DC	Driver EAGLERISE TRP	187x45x31mm	ON-OFF
22016	100W	24V DC	Driver MW	129x97x30mm	ON-OFF
22033	120W	24V DC	Driver EAGLERISE TRP	268x45x31mm	ON-OFF
22034	150W	24V DC	Driver EAGLERISE TRP	268x45x31mm	ON-OFF
22025	150W	24V DC	Driver MW	160x95x30mm	ON-OFF
22017	200W	24V DC	Driver MW	215x115x30mm	ON-OFF
41217	75W	24V DC	Driver dimmerabile LTECH	144x78x38.5mm	1-10V
41218	100W	24V DC	Driver dimmerabile LTECH	240x70x36mm	1-10V
41219	150W	24V DC	Driver dimmerabile LTECH	270x79x39mm	1-10V




KLIK_KLAK MINI
PROIETTORE

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41733	Nero/Black	5W	440	30°	3000K	Magnetic Track
41734	Bianco/White	5W	440	30°	3000K	Magnetic Track

INSTALLAZIONE
APPLICATION




Binario magnetico/
Magnetic track

DISEGNI TECNICI
TECHNICAL DRAWINGS



REGOLAZIONI
ADJUSTABILITY



KLIK_KLAK MINI
PROIETTORE

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41735	Nero/Black	10W	749	36°	3000K	Magnetic Track
41736	Bianco/White	10W	749	36°	3000K	Magnetic Track

INSTALLAZIONE
APPLICATION




Binario magnetico/
Magnetic track

DISEGNI TECNICI
TECHNICAL DRAWINGS



REGOLAZIONI
ADJUSTABILITY



KLIK_KLAK MINI
GLOBO

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41745	Nero/Black	10W	610	DIFF.	3000K	Magnetic Track
41746	Bianco/White	10W	610	DIFF.	3000K	Magnetic Track



INSTALLAZIONE
APPLICATION



Binario magnetico/
Magnetic track

DISEGNI TECNICI
TECHNICAL DRAWINGS



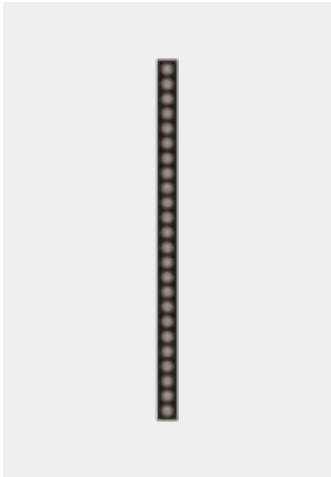


KLIK_KLAK MINI PUNTIFORME

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41717	Nero/Black	6W	650	30°	3000K	Magnetic Track
41718	Bianco/White	6W	650	30°	3000K	Magnetic Track
41719	Nero/Black	12W	1150	30°	3000K	Magnetic Track
41720	Bianco/White	12W	1150	30°	3000K	Magnetic Track
41721	Nero/Black	24W	2400	30°	3000K	Magnetic Track
41722	Bianco/White	24W	2400	30°	3000K	Magnetic Track

INSTALLAZIONE APPLICATION




Binario magnetico/
Magnetic track

DISEGNI TECNICI TECHNICAL DRAWINGS



41717
41718

41719
41720



41721
41722




KLIK_KLAK MINI PUNTIFORME ORIENTABILE

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41729	Nero/Black	8W	650	30°	3000K	Magnetic Track
41730	Bianco/White	8W	650	30°	3000K	Magnetic Track
41731	Nero/Black	16W	1150	30°	3000K	Magnetic Track
41732	Bianco/White	16W	1150	30°	3000K	Magnetic Track

INSTALLAZIONE APPLICATION



Binario magnetico/
Magnetic track

DISEGNI TECNICI TECHNICAL DRAWINGS

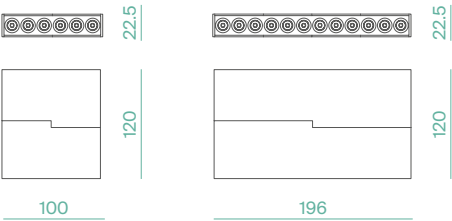


41729
41730

41731
41732

REGOLAZIONI ADJUSTABILITY






KLIK_KLAK MINI
LUCE DIFFUSA

LED	CREE
CRI	>90
PF	>0.5
SDCM	<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41723	Nero/Black	8W	460	105°	3000K	Magnetic Track
41724	Bianco/White	8W	460	105°	3000K	Magnetic Track
41725	Nero/Black	15W	900	105°	3000K	Magnetic Track
41726	Bianco/White	15W	900	105°	3000K	Magnetic Track
41727	Nero/Black	30W	1800	105°	3000K	Magnetic Track
41728	Bianco/White	30W	1800	105°	3000K	Magnetic Track

INSTALLAZIONE
APPLICATION




Binario magnetico/
Magnetic track

DISEGNI TECNICI
TECHNICAL DRAWINGS



41723
41724



41725
41726



41727
41728



KLIK_KLAK MINI
SOSPENSIONE

LED	CREE
CRI	>90
PF	>0.5
SDCM	<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41739	Nero/Black	5W	440	30°	3000K	Magnetic Track
41740	Bianco/White	5W	440	30°	3000K	Magnetic Track
41737	Nero/Black	10W	749	36°	3000K	Magnetic Track
41738	Bianco/White	10W	749	36°	3000K	Magnetic Track

INSTALLAZIONE
APPLICATION



Binario magnetico/
Magnetic track

DISEGNI TECNICI
TECHNICAL DRAWINGS

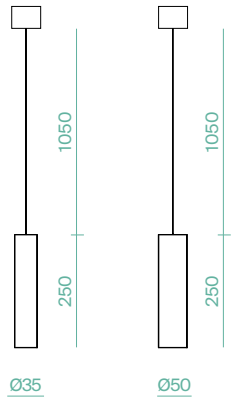

41739
41740

41737
41738





KLIK_KLAK MINI
SOSPENSIONE
GLOBO

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3

CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41741	Nero/Black	10W	610	DIFF.	3000K	Magnetic Track
41742	Bianco/White	10W	610	DIFF.	3000K	Magnetic Track

INSTALLAZIONE
APPLICATION



Binario magnetico/
Magnetic track

DISEGNI TECNICI
TECHNICAL DRAWINGS




KLIK_KLAK MINI
SOSPENSIONE
BELL

LED
CRI
PF
SDCM

CREE
>90
>0.5
<3


CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN	APPLICATION
41743	Nero/Black	10W	480	65°	3000K	Magnetic Track
41744	Bianco/White	10W	480	65°	3000K	Magnetic Track

INSTALLAZIONE
APPLICATION




Binario magnetico/
Magnetic track


DISEGNI TECNICI
TECHNICAL DRAWINGS




ACCESSORI
ACCESSORIES



41747 - 41748




41751 - 41752



41749 - 41750



41759 - 41760



41763



41761 - 41762




41132/A - 41133/A




41757 - 41758



41765 - 41766



41753 - 41754



41755 - 41756



41784 - 41788



41785 - 41789 - 41786 - 41790



42817 - 42814



42818 - 42815 - 42819 - 42816

CODE	FINISHING	DESCRIPTION
41713	Nero / Black	Struttura 1mt in alluminio estruso con testate / 1mt extruded aluminium profile with end-caps
41714	Bianco / White	Struttura 1mt in alluminio estruso con testate / 1mt extruded aluminium profile with end-caps
41715	Nero / Black	Struttura 2mt in alluminio estruso con testate / 2mt extruded aluminium profile with end-caps
41716	Bianco / White	Struttura 2mt in alluminio estruso con testate / 2mt extruded aluminium profile with end-caps
41764	Nero / Black	Copertura per rasatura 1 mt/1 mt mask for plasterboard thinning

ACCESSORI
ACCESSORIES


CODE	FINISHING	DESCRIPTION
41747	Nero / Black	Angolo 90° con spinotti e accessori/ 90° corner with accessories
41748	Bianco / White	Angolo 90° con spinotti e accessori/ 90° corner with accessories
41751	Nero / Black	Angolo 90° esterno e accessori/ Outer 90° corner with accessories
41752	Bianco / White	Angolo 90° esterno e accessori/ Outer 90° corner with accessories
41749	Nero / Black	Angolo 90° interno e accessori/ Inner 90° corner with accessories
41750	Bianco / White	Angolo 90° interno e accessori/ Inner 90° corner with accessories
41759	Nero / Black	Congiunzione elettrica con spinotti/ Linear electric connection with relative 3-pins connector
41760	Bianco / White	Congiunzione elettrica con spinotti/ Linear electric connection with relative 3-pins connector
41763	Nero / Black	Kit staffe incasso (2 pz)/ Brackets for recessed installation (2 pcs)
41761	Nero / Black	Staffe attacco soffitto kit 2pz/Brackets for ceiling installation 2 pcs
41762	Bianco / White	Staffe attacco soffitto kit 2pz/Brackets for ceiling installation 2 pcs
41132	Acciaio/Steel	Sospensione 2mt (1 pz)/ Suspension 2mt (1 pc)
41132/A	Nero / Black	Sospensione con cavo alimentazione 2mt (1 pz)/ Suspension 2mt with electrical wire (1 pc)
41133/A	Bianco / White	Sospensione con cavo alimentazione 2mt (1 pz)/ Suspension 2mt with electrical wire (1 pc)
41757	Nero / Black	Staffa connessione (1 pz)/Linear connection plate (1 pc)
41758	Bianco / White	Staffa connessione (1 pz)/Linear connection plate (1 pc)
41753	Nero / Black	Giunto a "X"/"X" connector
41754	Bianco / White	Giunto a "X"/"X" connector
41755	Nero / Black	Giunto a "T"/"T" connector
41756	Bianco / White	Giunto a "T"/"T" connector
41765	Nero / Black	Testata per alimentazione 24V/Front feed 24V
41766	Bianco / White	Testata per alimentazione 24V/Front feed 24V
41780	Nero / Black	Ponte di giunzione elettrica 130mm/Electric bridge connector 130mm
41781	Bianco / White	Ponte di giunzione elettrica 130mm/Electric bridge connector 130mm
41784	Nero / Black	Testata c/ driver 60W 230V dimm./Front feed w/ driver 60W 230V dimm.
41788	Bianco / White	Testata c/ driver 60W 230V dimm./Front feed w/ driver 60W 230V dimm.
41785	Nero / Black	Testata c/ driver 100W 230V dimm./Front feed w/ driver 10W 230V dimm.
41789	Bianco / White	Testata c/ driver 100W 230V dimm./Front feed w/ driver 100W 230V dimm.
41786	Nero / Black	Testata c/ driver 150W 230V dimm./Front feed w/ driver 150W 230V dimm.
41790	Bianco / White	Testata c/ driver 150W 230V dimm./Front feed w/ driver 150W 230V dimm.
42817	Nero / Black	Centrale c/ driver 60W 230V dimm./Central feed w/ driver 60W 230V dimm.
42814	Bianco / White	Centrale c/ driver 60W 230V dimm./Central feed w/ driver 60W 230V dimm.
42818	Nero / Black	Centrale c/ driver 100W 230V dimm./Central feed w/ driver 10W 230V dimm.
42815	Bianco / White	Centrale c/ driver 100W 230V dimm./Central feed w/ driver 100W 230V dimm.
42819	Nero / Black	Centrale c/ driver 150W 230V dimm./Central feed w/ driver 150W 230V dimm.
42816	Bianco / White	Centrale c/ driver 150W 230V dimm./Central feed w/ driver 150W 230V dimm.

DRIVER

CODE	WATT	V	DESCRIPTION	SIZE	MODE
22015	50W	24V DC	Driver MW	99x82x30mm	ON-OFF
22031	60W	24V DC	Driver EAGLERISE TRP	187x45x31mm	ON-OFF
22032	75W	24V DC	Driver EAGLERISE TRP	187x45x31mm	ON-OFF
22016	100W	24V DC	Driver MW	129x97x30mm	ON-OFF
22033	120W	24V DC	Driver EAGLERISE TRP	268x45x31mm	ON-OFF
22034	150W	24V DC	Driver EAGLERISE TRP	268x45x31mm	ON-OFF
22025	150W	24V DC	Driver MW	160x95x30mm	ON-OFF
22017	200W	24V DC	Driver MW	215x115x30mm	ON-OFF
41217	75W	24V DC	Driver dimmerabile LTECH	144x78x38.5mm	1-10V
41218	100W	24V DC	Driver dimmerabile LTECH	240x70x36mm	1-10V
41219	150W	24V DC	Driver dimmerabile LTECH	270x79x39mm	1-10V

Incasso funzionale in alluminio con ottica in polimero che combina un'ottima dissipazione del calore e un accurato controllo della luce. Controllo del flicker-free sul driver e accurata gestione della componente blu del LED per assicurare il miglior comfort visivo. CCT selezionabile 3000/4000°K con mantenimento dell'efficienza luminosa. CRI >90 e grado di protezione IP54 frontale. Ampia gamma di potenze per illuminamenti da 1234lm a 3569lm.

Functional aluminium recessed fitting with optical polymer reflector which combines an excellent heat sink with an accurate light control. Flicker-free separate control gear and Low Blue light technology guarantee an excellent visual comfort. Selectable CCT (3000/4000°K) maintaining the luminous efficacy unaltered. CRI>90 and IP54 frontal protection. Wide choice of powers available with lumen output ranging from 1234 to 3569

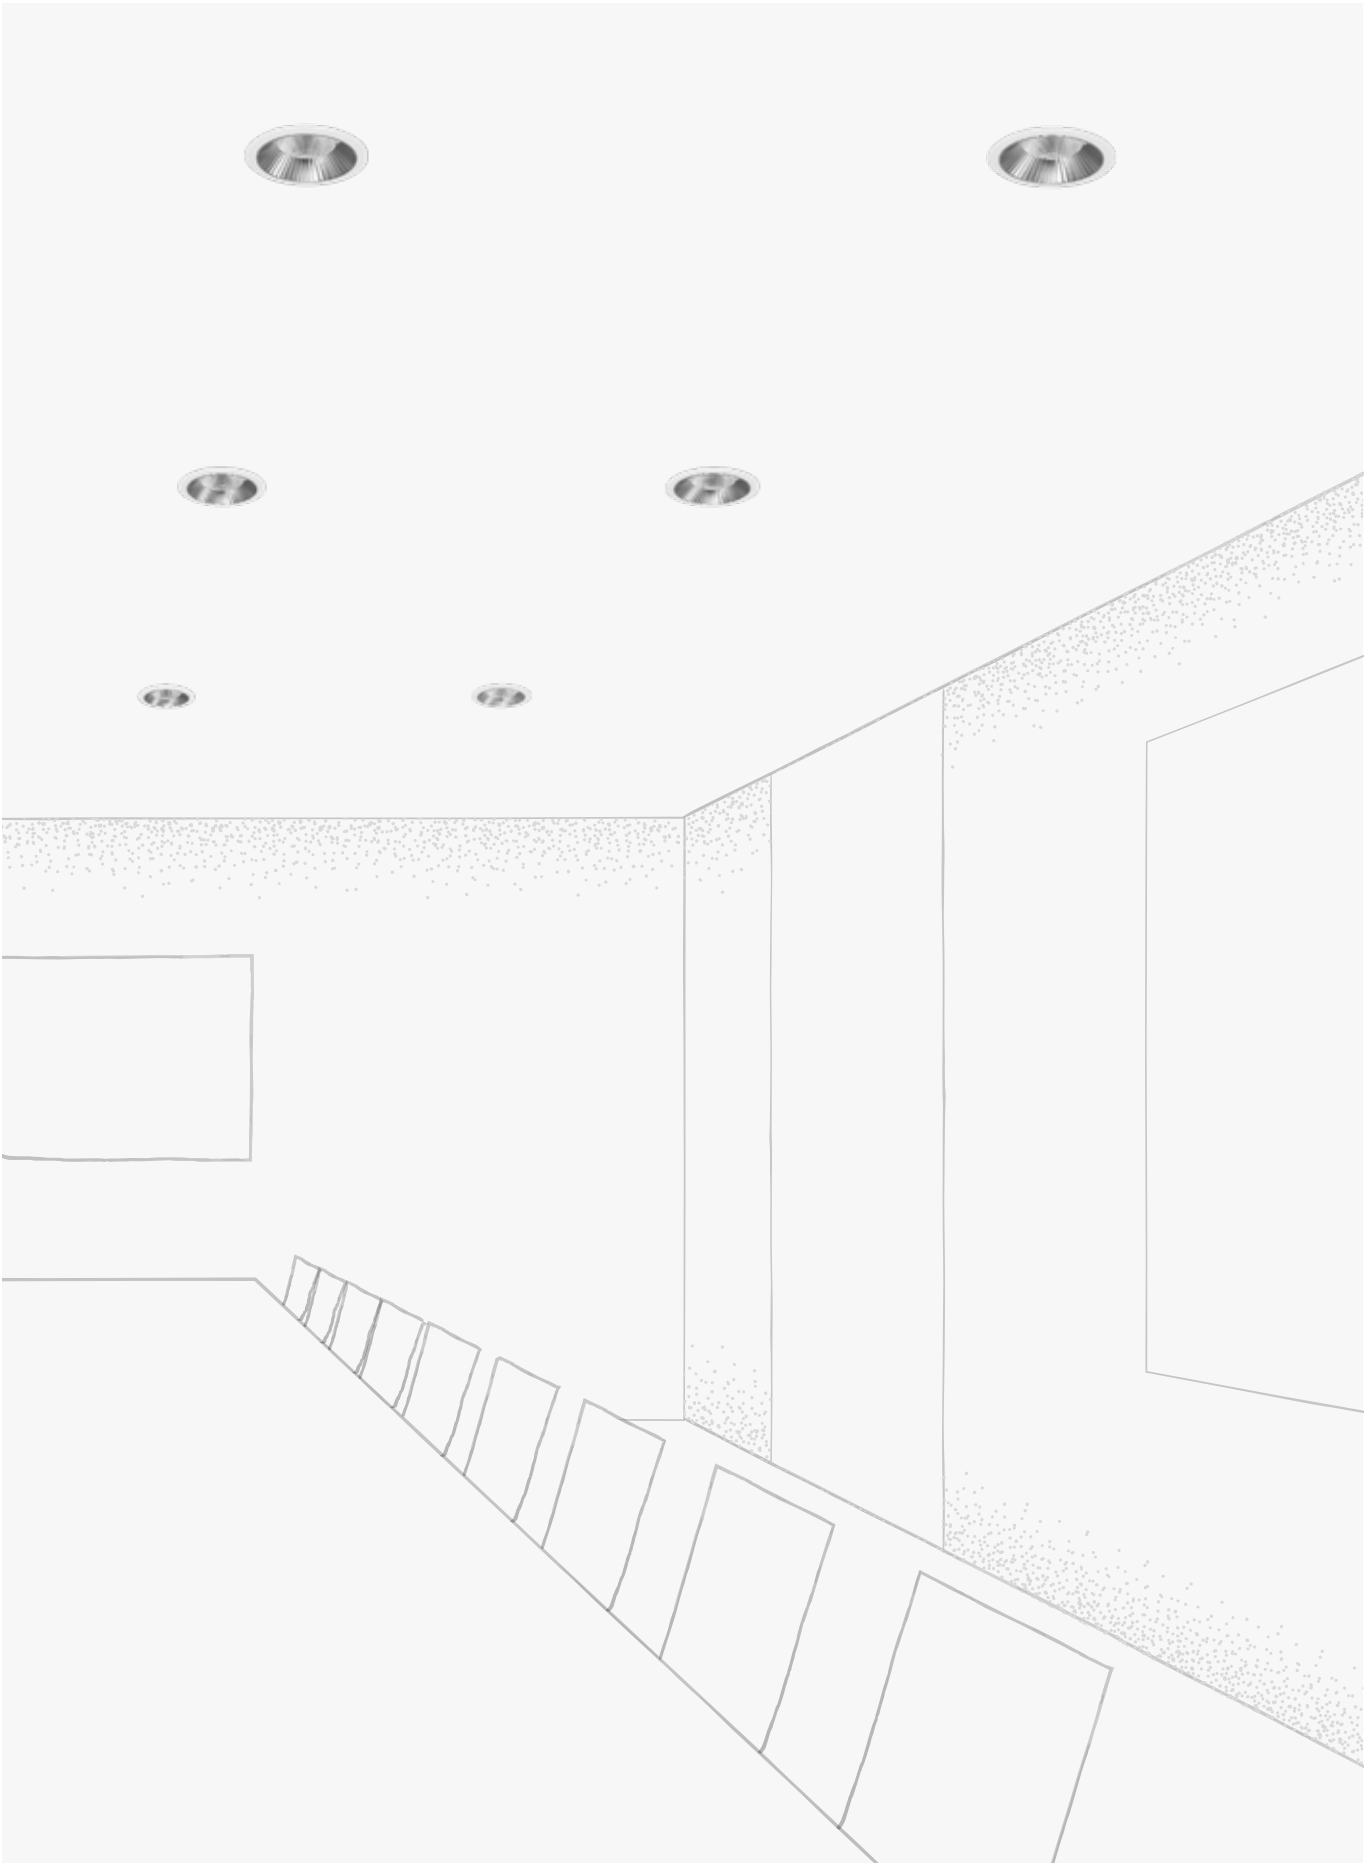



12W



18W



23W



28W, 35W

T° COLORE

Selezione della T° di colore mediante interruttore sul corpo, mantenendo l'efficienza luminosa di ca. 110lm/W.

T° COLOUR TEMPERATURE

Selection of the T° Colour Temperature through a switch mounted on the body, maintaining the luminous efficacy at approx 110lm/W unaltered.

DIMMER-ON/OFF/DALI

Possibilità di connessione ad un driver esterno con gestione ON/OFF o TRIAC o DALI.

Several separate control gears available: ON/OFF or TRIAC or DALI.

CRI > 90

La resa cromatica garantisce che il tipo di luce rispecchi i colori naturali di ambienti, oggetti o persone.

The high Colour Rendering Index means that the light emitted guarantees the natural rendering of colours of rooms, objects and people.

UGR < 19

Il riflettore incassato in polimeri ottici fornisce un'illuminazione omogenea ed efficiente, con un grado di abbagliamento luminoso che assicura la qualità della luce ed il benessere delle persone nel loro contesto lavorativo.

The deep-set aluminium reflector made of optical polymer ensures an efficient and homogeneous light with high glare control which provides quality of light and consequently the well-being of people in their working spaces.

IP54

L'apparecchio è protetto frontalmente contro la polvere e gli spruzzi d'acqua andando incontro alle normative dove richieste.

The fitting is protected at the front from dust and water spray complying with eventual IP standards required.

CABLAGGIO SEMPLICE

Le dimensioni dell'apparecchio lo rendono ideale per il relamping e gli spinotti Amp rendono facile e veloce il cablaggio.

EASY WIRING

The downlight dimensions make it an ideal choice as a retrofit fitting and the Plug-in connection makes wiring easy and fast.

3000K



4000K



BELLATRIX

LED

CRI

PF

OSRAM


>90

>0.9

CODE	FINISHING	WATT	LUMEN	BEAM	KELVIN
51011	Bianco/White	10,8W	1234/1278	55°	3000K/4000K
51012	Bianco/White	16,2W	1712/1779	55°	3000K/4000K
51013	Bianco/White	21,6W	2430/2500	55°	3000K/4000K
51014	Bianco/White	27W	2961/3140	55°	3000K/4000K
51015	Bianco/White	32,4W	3357/3569	55°	3000K/4000K

DISEGNI TECNICI

TECHNICAL DRAWINGS

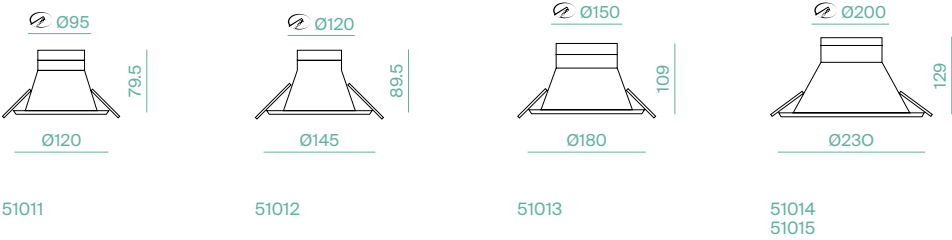

DRIVER

CODE	DESCRIPTION
51016	Driver ON/OFF 12W (10,8W) / 36V DC / 300mA
51017	Driver ON/OFF 18W (16,2W) / 36V DC / 450mA
51018	Driver ON/OFF 23W (21,6 W) / 36V DC / 600mA
51019	Driver ON/OFF 28W (27W) / 36V DC / 750mA
51020	Driver ON/OFF 35W (32,4W) / 36V DC / 900mA
51021	Driver TRIAC Dimming 12W (10,8W) / 36V DC / 300mA
51022	Driver TRIAC Dimming 18W (16,2W) / 36V DC / 450mA
51023	Driver TRIAC Dimming 23W (21,6W) / 36V DC / 600mA
51024	Driver TRIAC Dimming 28W (27W) / 36V DC / 750mA
51025	Driver TRIAC Dimming 35W (32,4W) / 36V DC / 900mA
51026	Driver DALI 12W (10,8W) / 36V DC / 300mA
51027	Driver DALI 18W/23W (16,2W/21,6W) / 36V DC / 450-600mA
51028	Driver DALI 28W/35W (27W/32,4W) / 36V DC / 750-900mA



LOGICA

Logica è un marchio
di Marino Cristal S.p.A.

Marino Cristal S.p.A.

Via Guardia del Consiglio 29
47899 Serravalle
Rep. di San Marino

Tel. (++378) 0549 901188
Fax (++378) 0549 900612

www.logicailluminazione.com
info@logicailluminazione.com